


**NEW**

**INNOTOOL**

LOOK FORWARD

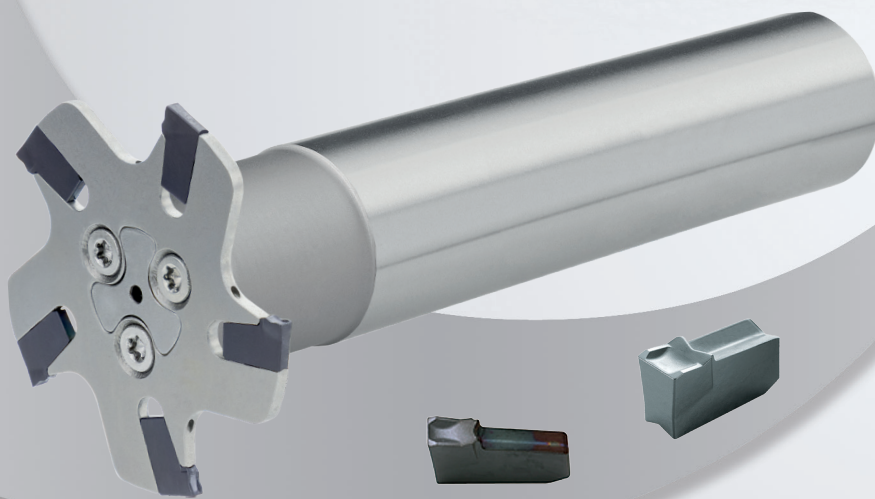

**SLOT IN TRILINK**

**SLOTING CUTTERS WITH NEW TRILINK CONNECTION**

- *Ø40, Ø50 and Ø63 are now standard*
- *Precisely directed internal coolant supply*
- *Designed with flat front and free of interfering contours*
- *Modular system*

## **SLOT IN** SLOTTING CUTTER


### **Product Overview**

Our **SlotIn** slotting cutters that have proven themselves since many years, have been given a comprehensive expansion of the application range with the introduction of the new, patented **TriLink** connection.

With  $\varnothing 40$ ,  $\varnothing 50$  and  $\varnothing 63$ , three smaller diameters are included in standard range, each with the familiar cutting widths of 1.6 to 5.1 mm.

The new product line is particularly characterized by the internal coolant supply and the flexible, modular design.

The **TriLink** adaption with cylindrical shank or **TopOn** connection makes exchanging the slotting cutters - if necessary - very easy.

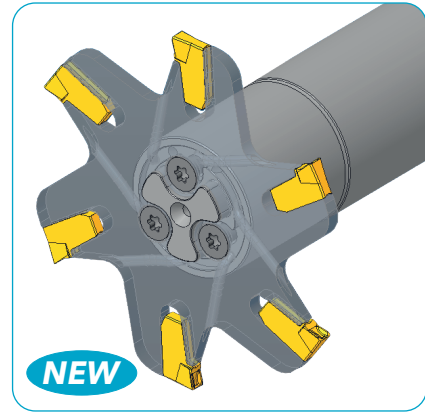

### **Technical Features & Advantage**


Unique features of the new **TriLink** line are the targeted internal coolant supply and the design with flat front side and no interfering contours.

Thanks to the modular design, standard holders with a cylindrical shaft and those with a **TopOn** connection can be used flexibly.

Overall, the slotting cutters run much more reliably than conventional counterparts, produce better surfaces and can also be operated at higher cutting speeds thanks to better cooling - which significantly increases the cost-effectiveness of the process.

The advantages in terms of quality, tool life and costs are definitely worth the small additional cost for the additively manufactured holder.

- $\varnothing 40$ ,  $\varnothing 50$  and  $\varnothing 63$  are now standard
- Precisely directed internal coolant supply
- Designed with flat front and free of interfering contours
- Modular design for flexible use of the different adaptations

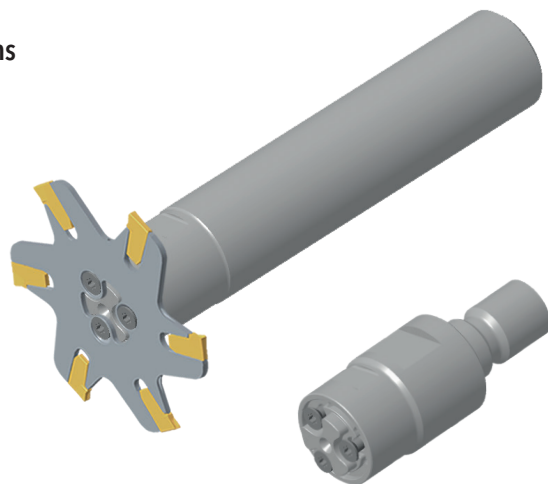

**Recommended Cutting Data**

**SLOT IN GCXF**



Insert:	GCXF				
Cutting width:	1,6	2	3	4	5
Average chip thickness:	hm = 0,050 mm	hm = 0,055 mm	hm = 0,065 mm	hm = 0,075 mm	hm = 0,075 mm


**Recommended Cutting Data:**

ISO	Material	Cutting speed Vc [m/min]				Feed per tooth fz [mm]
		1st choice dry machining resp. wear resistant carbide		1st choice wet machining resp. tough carbide		
P	unalloyed steel	IN2005	90 - 230	IN2005	80 - 210	-
	alloyed steel 800 N/mm <sup>2</sup>	IN2005	100 - 180	IN2005	90 - 160	-
	alloyed steel 1100 N/mm <sup>2</sup>	IN2005	70 - 110	IN2005	60 - 90	-
M	stainless steel	IN2005	70 - 150	IN2005	60 - 130	-
K	gray cast iron	IN2005	110 - 140	IN2005	90 - 120	-
	nodular cast iron	IN2005	55 - 110	IN2005	45 - 90	-
N	aluminum	IN2005	250	IN2005	250	-
S	high temperature alloys	IN2005	20 - 40	IN2005	20 - 40	-
	titanium alloys	IN2005	30 - 60	IN2005	30 - 60	-
H	hard machining < 54 HRC	-	-	-	-	-
	hard machining < 63 HRC	-	-	-	-	-

**Tips:**



- Please ensure to use these tools only up to a max. cutting speed Vc = 250 m/min..
- The worse the material machinability, the smaller the tool engagement should be chosen.
- The smaller the cutting tool diameter, the higher the cutting speed can be.
- If tool engagement is less than 1/3 of cutting tool diameter, the feed per tooth should be calculated with the following formula:

$$fz = hm \times \sqrt{\frac{D}{ae}}$$

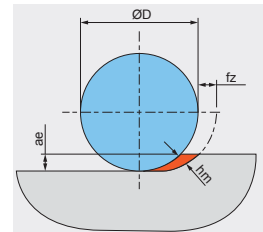


# SLOT IN **SLOTING CUTTER DFT01**

## MODULAR TRILINK ADAPTION

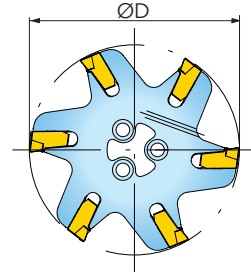


Designation	D	LT	b	MOD	n max.	Z	insert-S	IK	kg	inserts
DF.040.1.6T	40	1,4	1,6	TRI	1990	5	1	✓	0,01	<b>A</b>
DF.040.2.4T	40	1,9	2,2	TRI	1990	5	2	✓	0,01	<b>BC</b>
DF.050.1.6T	50	1,4	1,6	TRI	1590	6	1	✓	0,02	<b>A</b>
DF.050.2.4T	50	1,9	2,2	TRI	1590	6	2	✓	0,03	<b>BC</b>
DF.050.3.1T	50	2,4	3,1	TRI	1590	5	4	✓	0,03	<b>DEF</b>
DF.063.1.6T	63	1,4	1,6	TRI	1260	7	1	✓	0,03	<b>A</b>
DF.063.2.4T	63	1,9	2,2	TRI	1260	7	2	✓	0,03	<b>BC</b>
DF.063.3.1T	63	2,4	3,1	TRI	1260	6	4	✓	0,04	<b>DEF</b>


### A GCXF071601N

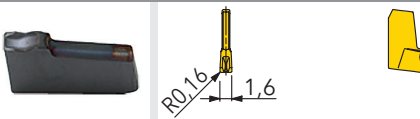


### B GCXF082202N

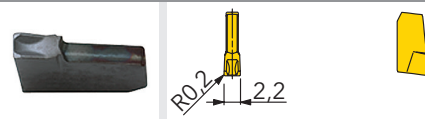


### C GCXF092402N

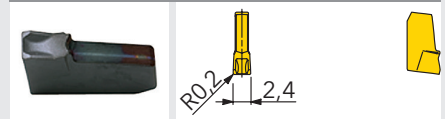


### D GCXF113102N

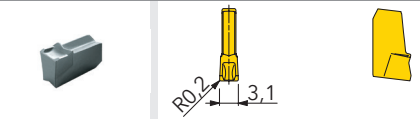

### E GCXF114103N

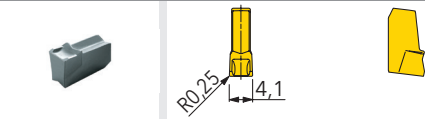


### F GCXF115103N

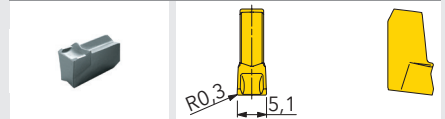

Designation	fz(min/max)	Design	Grade	IN2005							
GCXF071601N	0,04/0,12	positive geometry R0,16	●●●●								
GCXF082202N	0,05/0,13	positive geometry R0,2	●●●●								
GCXF092402N	0,05/0,15	positive geometry R0,2	●●●●								
GCXF113102N	0,06/0,18	positive geometry R0,2	●●●●								
GCXF114103N	0,08/0,20	positive geometry R0,25	●●●●								
GCXF115103N	0,08/0,20	positive geometry R0,3	●●●●								

● = P ● = M ● = K ● = N ● = S ○ = H

## SPARE PARTS




cutting width

1,6 - 2,2	ESG 0,5
3,1	ESG 1


① = ejector

## TRILINK ADAPTION WITH CYLINDRICAL SHAFT

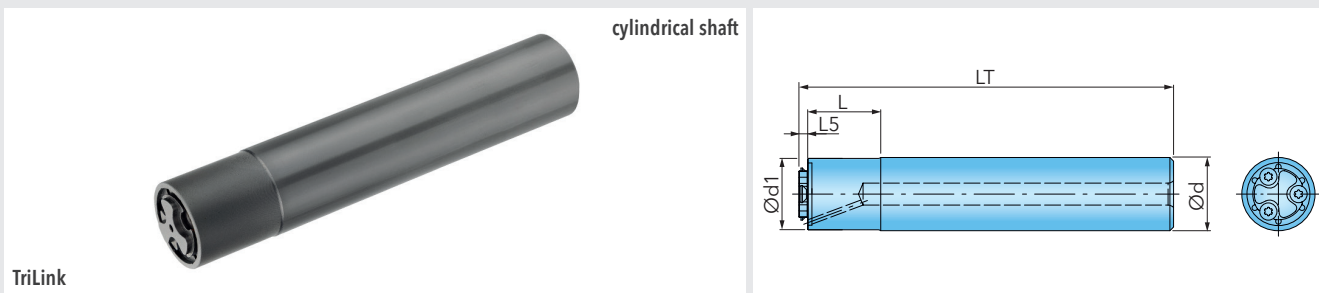


Designation	MOD1	d	d1	LT	L	L5		kg
S20PA14SA100	TRI	20	19,5	101,4	20	1,4	✓	0,22
S20PA19SA100	TRI	20	19,5	101,9	20	1,9	✓	0,22
S20PA24SA100	TRI	20	19,5	102,4	20	2,4	✓	0,22

The suitable adaption can be found by "LT" dimension of the cutter to be mounted. This must correspond to dimension "L5" of the adaption.




① = Clamp screw - TriLink

## TRILINK ADAPTION WITH TOPON CONNECTION

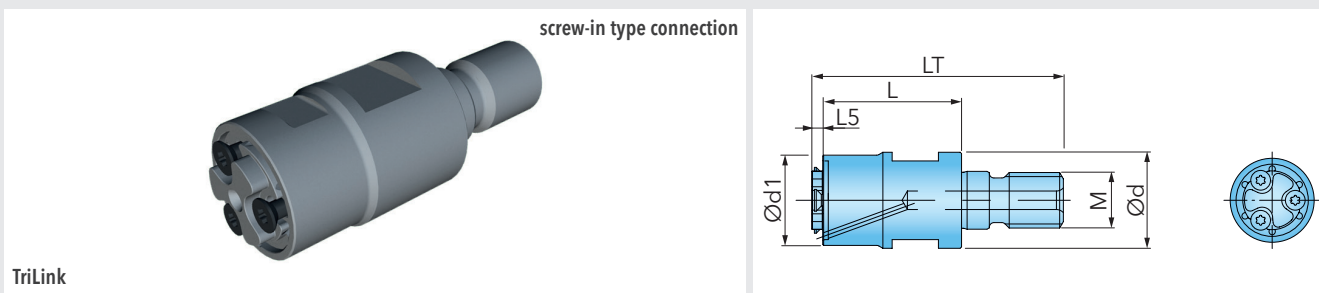


Designation	MOD1	d	d1	LT	L	L5	M		kg
MOD12PA14SA030	TRI	21	19,5	53,4	30	1,4	M12	✓	0,09
MOD12PA19SA030	TRI	21	19,5	53,9	30	1,9	M12	✓	0,09
MOD12PA24SA030	TRI	21	19,5	54,4	30	2,4	M12	✓	0,09

The suitable adaption can be found by "LT" dimension of the cutter to be mounted. This must correspond to dimension "L5" of the adaption.



① = Clamp screw - TriLink



Order-No.: none • Digital version 10-2023  
Changes and printing errors reserved.